


PRODUCT DESCRIPTION

SPEC SHEET

- Arched Lighted (LED strip) mirror with frosted edge
- Plexiglass backing frame allows for LED light on both front and back of mirror.
- 3 color light switch + dimming function
- Antifog function
- 5mm thick high quality copper free mirror
- Hard-wired electrical installation
- Connection to a light switch is optional (not intended for use with dimmers)
- LED intensity is 55 foot candle (600 lux) at standard user distance
- LED life is 50,000 hours
- Features 3000K, 4500K, and 6000K color temperatures
- CRI 80+
- Two year manufacturer warranty
- Solid Aluminum + plexiglass frame
- ETL and IP44 rated and certified (LED, drivers, and switches)
- Aluminum french cleat mounting system for easy install



Total Wattage

65 W


ROUGHING-IN DIMENSIONS




•			
	IM14830-10	29 1/2"	75 W
11/8"	IM14836-10	35 1/2"	85 W

Model #

IM14824-10

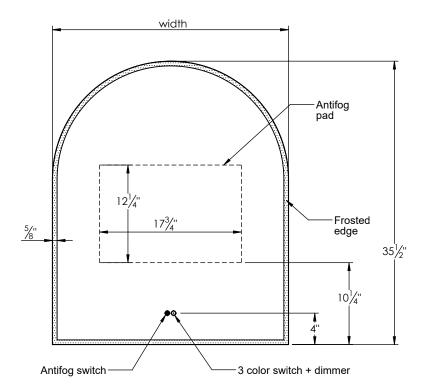

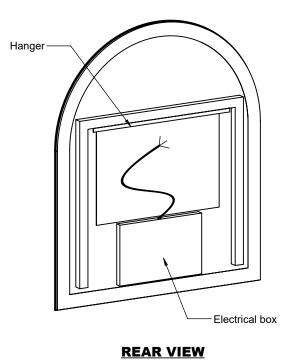

Width

23 3/4"

FRONT VIEW